

### Features

- Suitable for WET location/outdoor
- 90W-145W power consumption to replace 250-400W MH
- Lumen output from 9300-14000lm
- CCT are available at 3500, 4000 and 5000K
- Full cutoff and compliance to Dark Sky requirement
- Type III polycarbonate optical lens with UV stabilizers
- Built-in UL class 2 driver, optional for photocell
- 50,000H Life
- UL/cUL listed and DLC qualified




### Specifications

	SL-WPLG-90W	SL-WPLG-95W	SL-WPLG-135W	SL-WPLG-145W
<b>Wattage</b>	90W	95W	135W	145W
<b>Lumens</b>	9500LM	9500LM	14000LM	14000LM
<b>Efficacy</b>	106lm/W	100lm/W	104lm/W	97lm/W
<b>CRI</b>	82	82	82	82
<b>Color Temp</b>	5000K	5000K	5000K	5000K
<b>Voltage</b>	120VAC	347VAC	120VAC	347VAC
<b>Finish Colour</b>	Dark Bronze			
<b>Optical Lens</b>	Polycarbonate (UL Recognized) (f1) Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C			
<b>Mounting</b>	Wall Mounting			
<b>Photocell</b>	120V-277VAC (UL and CSA listed) 3/4in long threaded nipple, 30-45 second time delay, Power Consumption: less than 0.9 watts at 120VAC			

## Applications

- Security, pathway and perimeter lighting
- Building entryways and walkways


## Dimensions (mm)

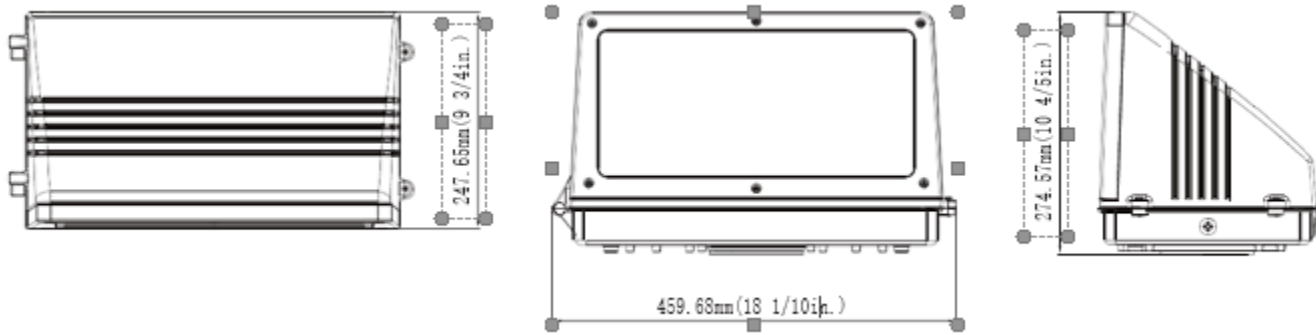


## Photometrics

### SL-WPLG90W

Luminous Intensity Distribution Curve




Illuminance at a Distance



### SL-WPLG135W

Luminous Intensity Distribution Curve



Illuminance at a Distance

