

## Features

- Sealed die-casting profile for outdoor appliances
- Lumen output from 4050-6700lm, to replace 100WMH
- Three ½" threaded conduit and one ¾" conduit entry points
- Polycarbonate optical lens with heat resistors
- Multiple voltage input available, 120-277V and 347V input
- Low profile design
- 50,000H Life
- UL listed for wet locations, DLC qualified as parking garage luminaires




## Specifications

	SL-CP-45W	SL-CP-65W	SL-CP-70W
<b>Wattage</b>	45W	65W	70W
<b>Lumens</b>	4050LM (Non-Dimmable) 4200LM (Dimmable) 4200 LM (HV Dimmable)	6700LM (Dimmable) 6700LM (HV Dimmable)	5900LM (Non-Dimmable)
<b>Efficacy</b>	90lm/W	90lm/W	84lm/W
<b>CRI</b>	75	75	75
<b>Color Temp</b>	5000K	5000K	5000K
<b>Voltage</b>	120-277VAC 347 VAC	120-277VAC 347 VAC	120-277VAC
<b>Finish Colour</b>	Black or White		
<b>Optical Lens</b>	Polycarbonate (UL Recognized) (f1) Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C		
<b>Mounting</b>	Pendant Mounting and Direct Surface Mounting		

## Applications

- Parking structures, storage areas, shopping area walkways
- Entryway, low level security
- Ferry terminals, loading docks, warehousing


## Dimensions (mm)

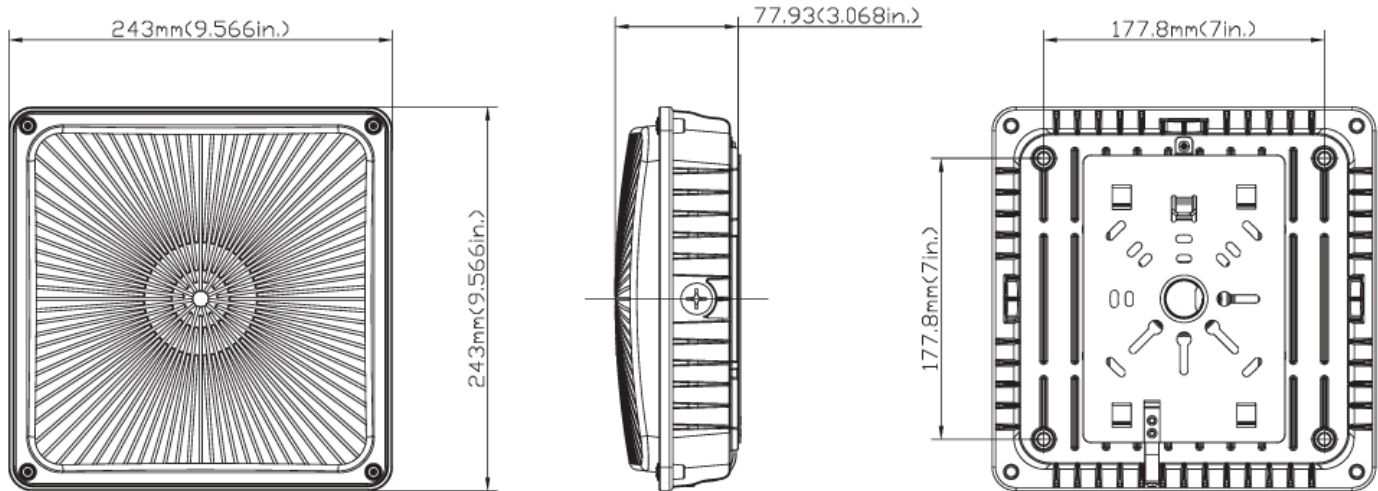


## Photometrics

### SL-CP-45W

Luminous Intensity Distribution Curve

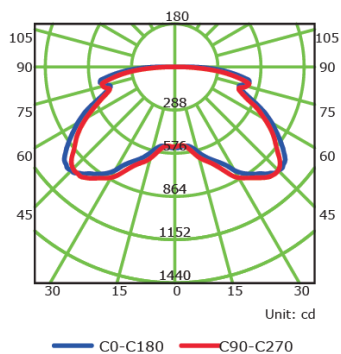


Illuminance at a Distance

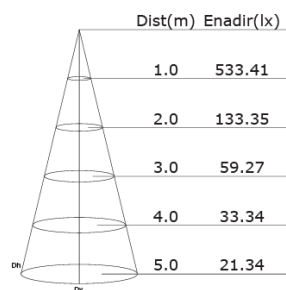

### SL-CP-70W

Luminous Intensity Distribution Curve

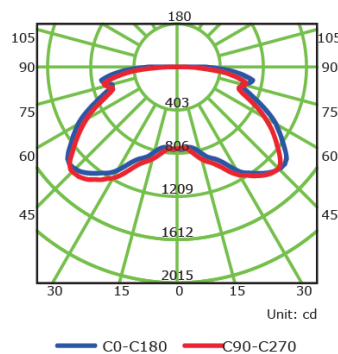

Illuminance at a Distance

