

### Features

- Adopted 1/2 aluminum pipe structure, good for heat dissipation capacity
- Built-in Electronic and Magnetic Ballast Compatible
- Adopted LM80 Approved SMD Epistar 2835 LEDs as lighting source
- Eco-friendly, no heavy metal pollution and harmful gas.
- Save 80% more energy than traditional fluorescent lights.
- No flickering, soft lighting, not harmful to human eyes.
- Plug-in and play, no need to rewire
- Beam Angle 140°
- 50,000H Life
- Working Temperature -20~+60°C
- ETL, cETL and DLC listed




### Specifications

	SL-TBT8-15W	SL-TBT8-18W
<b>Wattage</b>	15W	18W
<b>Lumens</b>	1950LM	2340LM
<b>CRI</b>	Ra>80 (optional >90)	
<b>Color Temp</b>	2700-6500K	
<b>Voltage</b>	AC90-277V	
<b>Finish Colour</b>	Clear/Frosted	
<b>Power Factor</b>	>0.95	
<b>Base</b>	2G11/GY10/G23	

## Applications

- Residential buildings, home office
- Commercial buildings, meeting rooms
- Schools, libraries, hotels, hospitals
- Parking garages, warehouses

## Dimensions (mm)

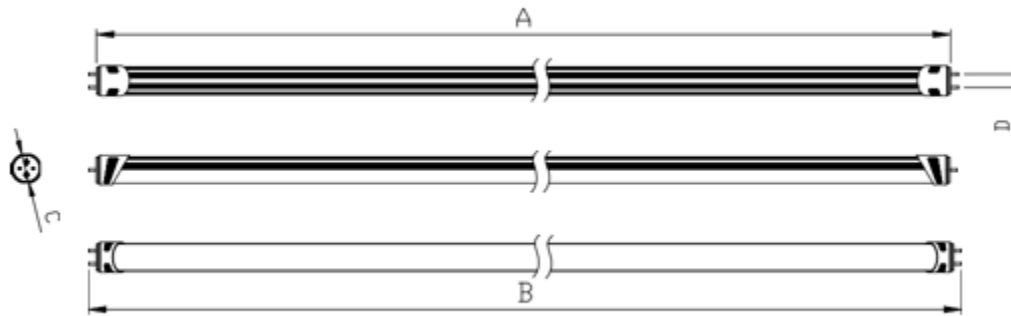

Spec (mm)	A (mm)	B (mm)	C (mm)	D (mm)
L1200*Ø26	1199.4	1213.6	26	15